

ERMAN YACHTING

ERMAN YACHTING

DESIGN OF NOBILITY




2011

HARD TOP AND FLY VERSION

ERM-Lobster50 LOBSTER YACHT

SPECIFICATIONS

MATERIAL	GRP
LOA	15,10 M 50 FT
BEAM	4,70 M 15 FT
DRAFT	1,00 M 3 FT
DISP	15000 KG
FUEL	2000 LT
FRESH WATER	1000 LT
GREY WATER	350 LT
BLACK WATER	300 LT
CABIN	3
BATHROOM	2
BERTH	8 / 9
CREW CABIN	1
CREW BERTH	1/2
CERTIFICATION	RINA / CE
EQUIPPED	FULL
ENGINES	TWIN YANMAR 2 x440HP DIESEL / MAX 30KNOTS TWIN VOLVO 2 x 570HP DIESEL / MAX 35KNOTS

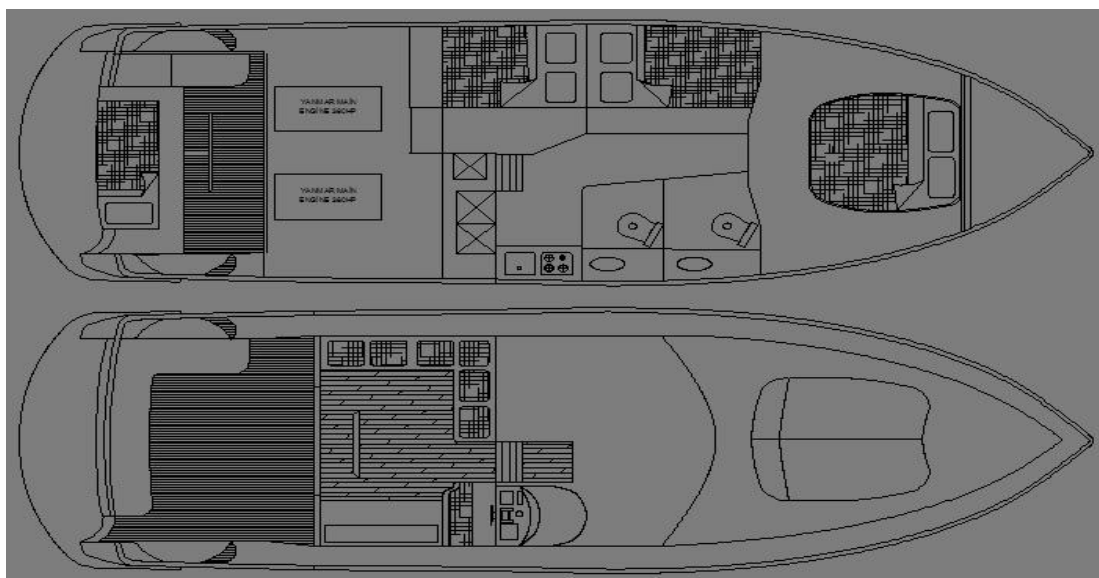

HIGHLIGHTS

MAIN DECK

Riding light
 Remote control searchlight
 Full set of navigation lights
 Reversible electric anchor winch with foredeck and helm position controls
 Self-stowing 16kg Delta anchor with 80metre chain (10mm)
 Bow rope storage locker
 Stemhead roller with automatic anchor launch and retrieve
 Stainless steel bow, stern and spring cleats
 Stainless steel guardrails
 Stainless steel handrails
 Stainless steel rubbing band with rubber insert
 Twin electric horns
 Fuel and water fillers
 Sunbathing cushions
 Deck lights
 Stainless steel bollards

SALOON & GALLEY

U-shaped leather convertible sofa
 Dining table
 Carpet / wooden floor
 LCD TV/ DVD / CD / Hi-fi music system Home Theatre
 Overhead downlighters
 Main electrical control panel
 Sliding door to cockpit
 Worktop
 Twin stainless steel sinks
 Electrical burners
 Refrigerator
 Deep-freezer
 Storage cupboards, drawers and lockers
 Hand-operated fire extinguisher

COCKPIT

Double helm seat
 Air-conditioner
 Leather instrument pannel
 Fuel gauges
 Electronic lever for engine control
 Rudder angle indicator
 Power assisted hydraulic steering system
 Remote control anchor winch
 Trim tab controls
 Bow thruster control
 Generator control
 Autopilot (Raymarine)
 Chart plotter (Raymarine)
 GPS-Fishfinder (Raymarine)
 Radar (Raymarine)
 Echo sounder with alarm (Raymarine)
 VHF with DSC R/T
 Windscreen wipers
 Bilge pump controls with visual 'pump running' indicators
 Warning lights
 Remote control searchlight
 Compass
 Horn button
 Teak-laid cockpit deck
 L shaped dining area
 Cockpit lighting
 Stainless steel grabnails
 Cockpit wet bar with refrigerated cold box
 Hydraulic Telescopic Gangway 2,5m lifting capacity of 260Kg
 Fender stowage
 Access hatch to engine room
 220/240 V shore support inlet in lockers
 Stainless steel grabnails
 Radar support
 Foldaway swimming ladder with teak-laid steps
 Teak-laid bathing platform for dinghy
 Hot and cold shower
 Hi-fi music system with marine speakers
 One tab One fridge
 Hand-operated fire extinguisher

MASTER CABIN

Double bed with drawers
Two wardropes
Drawers with shelves
Overhead lights / ceiling lights
220 V power points
LCD TV / DVD / Hi-fi music system Home Theatre
Curtains upholstery and carpet
Bathroom with electrical toilet and 220 V shaver point
Exclusive wooden materials
Portholes
Hand-operated fire extinguisher
Hidden vault cash

GUEST CABIN

-2CABINS VERSION AVAILABLE-

Two single beds or one double bed
LCD TV / DVD / Hi-fi music system Home Theatre
Wardropes
Storage lockers under the beds
Overhead lights / ceiling lights
Curtains upholstery and carpet
Bathroom with electrical toilet and 220 V shaver point
Portholes
Hi-fi music system
Hand-operated fire extinguisher

FUEL SYSTEM

Two connected stainless steel fuel tanks (2 x 1000 lt)
Fuel fillers
Fuel filters / glass bowl
Filter for generator

WATER SYSTEM

Stainless steel fresh water tank 1000 lt
Automatic water pump
Water fillers
Stainless steel grey water tank 350 lt
Stainless steel black water tank 300 lt
Macerator pump

PROPULSION DRIVE SYSTEMS &

ENGINE ROOM

Gear configuration direct shaft
Propellers NiBrAl alloy, four blades
Stainless steel shafts dia.60mm
Bow thruster max power 5 hp
Stainless steel rudders
Hydraulic steering
Trim tabs
Electronic engine control
Engine room inlet /outlet fans with time delay
Engine room lighting
Engine room acoustic isolation
Engine room thermic isolation

ELECTRICAL SYSTEM 24v

BILGE PUMP SYSTEM

Generator (Kohler) 7,5 kw, 220 V, 50 Hz
Two 200 Ah batteries for engine starting
Four 200 Ah service batteries
One 90 Ah battery for generator
220 V a.c single phase, 50 Hz for power circuits
24 V d.c. batteries
50 Ah – 24 V float battery charger for service batteries
25 Ah – 24 V float battery charger for engine start batteries
Circuit breakers on all circuits
Generator / shore support change over switch
Water heater
Four Automatic electric bilge pumps
