

PURSUIT®

315 OFFSHORE



PERFORMANCE DATA

RPM	MPH	GPH	MPG	RANGE*
600	3.6	1.3	2.73	698
1000	5.8	2.5	2.35	600
1500	7.8	4.1	1.90	486
2000	9.3	6.7	1.39	355
2500	9.9	9.7	1.02	261
3000	11.0	12.7	0.87	221
3500	17.4	17.3	1.00	256
4000	31.3	23.4	1.34	342
4500	37.0	29.5	1.25	321
5000	41.7	39.3	1.06	271
5500	46.0	46.4	0.99	253
5750	47.8	47.4	1.01	258

* Range based on 90% Fuel Capacity

OS315 SPECIFICATIONS


L.O.A. w/Pulpit	32' 8"
L.O.A. w/o Pulpit	30' 10"
Beam	10' 8"
Hull Draft (motors up)	21"
Hull Draft (motors down)	36"
Fuel Capacity	284 U. S. gallons
Max. Horsepower	600
Average Dry Weight (w/twin F250)	11,140 lbs.
Water Capacity	30 U. S. gallons
Holding Tank Capacity	18 U. S. gallons
Clearance w/ Hardtop**	9' 3"
Deadrise	20°

YAMAHA POWER

Outboard Model	Twin F250 (V-6)
Outboard Dry Weight	558 lbs.
Mounting Hole	#2
Optimum Propeller	15-1/2" x 17" SWS II SDS

**Hardtop Clearance shown does not include options which could increase this height dimension.

Best Cruise MPG

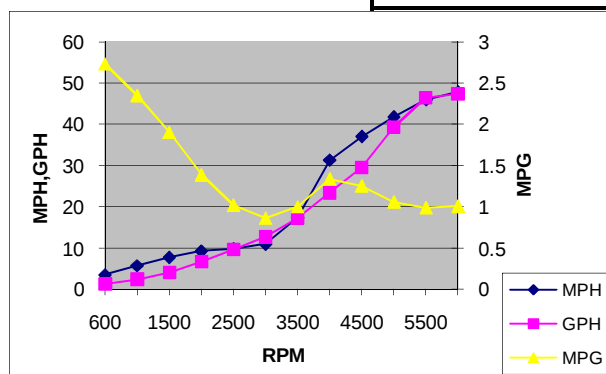

0 to 30mph Acceleration = 7.0 sec.

TEST CONDITIONS

Full Boat Test Weight	13,150 lbs.***
Test Personnel	2
Air/Water Temperature	88° / 84°

***Test Weight includes full fuel, full water, all optional equipment, personnel, and safety gear.

Note: Data may vary due to changes in weather, elevation, options, load and bottom conditions.

Fuel data gathered with Yamaha Fuel Management System.
Speed data gathered with GPS.

